



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 026 707 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.08.2000 Bulletin 2000/32

(51) Int. Cl.⁷: **H01F 27/02**, H01F 27/29

(21) Application number: **00100859.8**

(22) Date of filing: **18.01.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **03.02.1999 GB 9902288**

(71) Applicant:
Pace Micro Technology PLC
Shipley, West Yorkshire BD18 3LF (GB)

(72) Inventor: **Jenkins, Steven**
Huddersfield, HD4 5RS (GB)

(74) Representative: **Wood, Graham**
Bailey Walsh & Co,
5 York Place
Leeds LS1 2SD (GB)

(54) **Wire wound inductor**

(57) The invention relates to a wire wound inductor for use as an electrical component of electrical or electronic apparatus, wherein said inductor is formed from a length of wire which is wound about an axis a required number of times and at least a portion of the surface of the wire facing externally of the inductor is relatively flat to define a location portion for the inductor. The inductor can be provided with a number of relatively flat location portions which allow improved efficiency in the picking and placing of the same in position for joining to a surface using automated apparatus and in supporting the inductor on the surface.

BEST AVAILABLE COPY

EP 1 026 707 A1

Description

[0001] The invention of this application relates to an improvement to a wire wound inductor of the type typically used as a component of many electrical and electronic apparatus such as, for example, set top box broadcast data receivers.

[0002] Currently, in order to allow machine placing of inductor components the wire of the inductor is formed around ceramic blocks. These ceramic blocks can adversely affect the inductor characteristics but if the ceramic block is not used the wire wound inductor needs to be hand fitted which is time consuming and expensive.

[0003] Inductor components are used in many instances and are typically fitted to a printed circuit board in conjunction with a number of other components as part of an assembly process which involves the assembly and placing and joining of a series of components in a required configuration to form a control and operating systems for an item of electrical apparatus. Conventionally the assembly of components to form this type of apparatus is highly automated and is required due to the relatively small size of the components and the speed of assembly required and the high volume of components on the board. The ability to automate the process is increased due to the relatively uniform size of the components which makes the use of automated and robotic pick and place machines relatively easy as the size and positioning of the components can be accurately easily determined and controlled. However, it is found that if inductors are used where the wire is not wound around ceramic blocks the same cannot easily be picked up by a pick and place machine as the inductors are relatively large and are formed of a wire which is wound into a coil with the wire being of circular cross section and so it is extremely difficult to pick up a wire wound inductor by the suction mechanism of a pick and place machine. Furthermore, it is difficult, even when the inductor is positioned in the required position for joining to the board, for the same to be held in the required position during the joining process, which is typically by soldering, and therefore the use of inductors, although necessary, is problematic.

[0004] The aim of the present invention is to provide an inductor in an improved form to allow the same to be more easily picked and placed and joined to a board in the required position than is conventionally the case.

[0005] In a first aspect of the invention there is provided a wire wound inductor for use as an electrical component of electrical or electronic apparatus, wherein said inductor is formed from a length of wire which is wound about an axis a required number of times and wherein a portion of the surface of the wire facing externally of the inductor is relatively flat to define a location portion for the inductor.

[0006] In one embodiment all of the surface of the wire which faces externally of the inductor is provided to

have a flat form. Preferably the said external surface has no visible protrusions and is planar in form.

[0007] In use therefore, when wire of this form is used the external surface of the inductor is relatively flat and therefore relatively smooth which improves the ability for the same to be picked up by a suction mechanism of a pick and place machine.

[0008] In one preferred embodiment, the wire used for the inductor is formed of strip material and, when wound, a relatively flat first surface faces externally of the inductor and an opposing flat surface faces internally of the inductor.

[0009] The wire can be wound about an axis as many times as required depending on the inductance value required or alternatively the diameter of the winding can be altered to determine the inductance value required.

[0010] In one embodiment, a preferred material cross section is for the external and internal flat surfaces to be 1mm in width and for the depth of the material between said surfaces to be 0.2mm but it shall be appreciated that these are example dimensions only and are not intended to restrict the application in any way.

[0011] In a further feature of the invention the inductor is formed so that successive windings of the wire are formed with a flattened portion in the same respective position to form in combination a flattened portion which improves the ability for the same to be picked up by suction means. Typically the area of the flattened portion formed by the combination of windings is the same or greater than the suction head used with the pick and place apparatus.

[0012] In a further feature of the invention the ends of the wire of the inductor coil are formed with flattened portions which form feet, with the flattened portions of the respective ends of the wire lying in substantially the same plane so as to act, when the same are brought into contact with a surface, as supporting and locating feet for the inductor. Typically the feet act to support the inductor in position on a printed circuit board and are soldered and/or otherwise joined to the board. Typically, the feet portions are of a dimension to suit specific fixing and locating requirements.

[0013] In one embodiment the wire wound inductor can include on the wire used to form the same first, relatively flat location portions to allow the inductor to be picked and placed in position by automated apparatus and the same portions or second relatively flat portions can be provided to provide improved location and support of the inductor on the surface to which the same is to be joined.

[0014] Specific embodiments of the invention will now be described with reference to the accompanying drawing wherein:-

Figure 1 illustrates an isometric diagram of an inductor according to one embodiment of the inven-

tion; and

Figure 2 illustrates an elevation of the inductor of Figure 1.

[0015] Referring to the figures 1 and 2 they show an inductor 2 formed of a strip of material 4 wound around a central axis 6 to form a coil. It will be seen that the wire 4 used is in the form of a strip so that it has an internal flat surface 8 and an external flat surface 10. In the form shown, the coil is also provided with a flattened portion 12 which in this case is formed from one winding of the strip but may in certain instances be formed from a series of windings all provided with a flattened area. The provision of the flattened portion 12 is to act as location means to allow suction means, not shown, of a pick and place machine to obtain a secure fitting on the portion which is sufficient to allow the coil to be picked up, moved and placed in position on a board in combination with other components to form the electrical apparatus.

[0016] In order to allow the inductor to be securely positioned on the board for soldering to join the same to a printed circuit board (not shown), the inductor coil in this embodiment is provided with further location means in the form of portions 14 at each end of the wire and these portions are formed and provided so that the same lie in substantially the same plane so that when the same are positioned on the board both portions contact with the board and acts as location portions to support the inductor in the required position during soldering.

[0017] Thus, the inductor formed according to the present invention will be of benefit both in the efficiency of picking and placing the same in position for joining using automated apparatus and during the joining process itself. This allows fast assembly, consistent placement and overcomes the need for any hand cropping or cutting of the component to fit and overcomes the need to use ceramic blocks. It also ensures that the existing advantages of wire wound inductors are maintained in terms of cost effectiveness and high performance which is typical of this type of through-hole wire wound air core conductors

[0018] The inductor of the invention also has further advantages over current inductors in that it decreases the dynamic range of the tuning voltage required to achieve full frequency range of certain modulators such as the Philips TDA 8822 and can also be used to reduce the adverse temperature effects which are associated with inductor "Q" factor such as with the Motorola MC4435 modulator. This is achieved as the invention enables the automatic placing of the wire wound inductor without the need for the ceramic block insert and thereby improves the inductor Q value in comparison with the conventional inductors.

Claims

1. A wire wound inductor for use as an electrical component of electrical or electronic apparatus, wherein said inductor is formed from a length of wire which is wound about an axis a required number of times and characterised in that a portion of the surface of the wire facing externally of the inductor is relatively flat to define a location portion for the inductor.
2. A wire wound inductor according to claim 1 characterised in that the surface of the wire which faces externally of the inductor is provided to have a flat form and is planar in form.
3. A wire wound inductor according to claim 1 characterised in that the wire used for the inductor is formed of strip material and, when wound, a relatively flat first surface faces externally of the inductor and an opposing flat surface faces internally of the inductor.
4. A wire wound inductor according to claim 3 characterised in that the external and internal flat surfaces are 1mm in width and the depth of the material between said surfaces is 0.2mm.
5. A wire wound inductor according to claim 1 characterised in that successive windings of the wire are formed with a relatively flat portion in the same respective position to form location portions for the inductor handling.
6. A wire wound inductor according to claim 5 characterised in that the location portions are provided to improve location with the suction head of an automated pick and place component assembly apparatus.
7. A wire wound inductor according to claim 1 characterised in that the ends of the wire used to form the inductor coil are each formed as relatively flat portions to form location portions so as to act, when the same are brought into contact with a surface, as means for locating the inductor on the surface.
8. A wire wound inductor according to claim 7 characterised in that the location portions support the inductor in position on the surface of a printed circuit board and are soldered and/or otherwise joined to the board.
9. A wire wound inductor according to claim 7 characterised in that the inductor wire includes further flat portions which act as location portions for the suction head of an automated pick and place component assembly apparatus.

10. A wire wound inductor according to claim 1 characterised in that the required inductance value of the inductor is achieved by winding the wire about an axis as many times as required and defining the diameter of the winding.

5

10

15

20

25

30

35

40

45

50

55

4

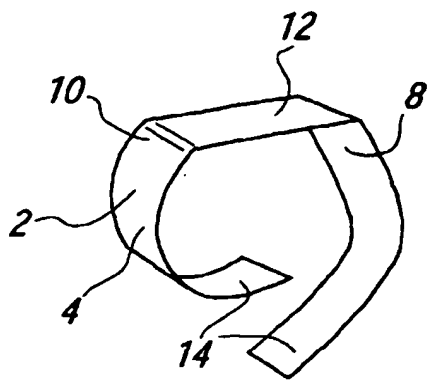


FIG. 1

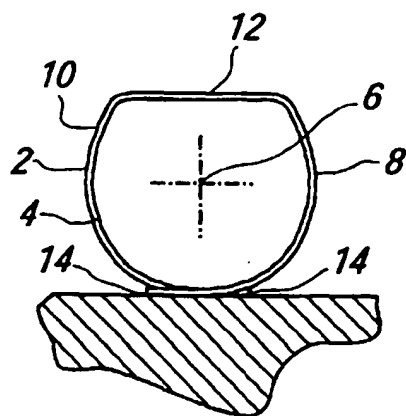


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 10 0859

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 96 19814 A (HAGN ERWIN) 27 June 1996 (1996-06-27) * page 7, line 15 - page 9, line 9 *	1,2	H01F27/02 H01F27/29
A	DE 12 73 630 B (TELEFUNKEN) 25 July 1968 (1968-07-25) * figures 1-3 *	3	
A	WO 90 13135 A (MOTOROLA INC) 1 November 1990 (1990-11-01)		
A	DE 36 15 307 A (HUETTLINGER JOHANN LEONHARD) 12 November 1987 (1987-11-12)		
A	DE 94 10 532 U (HAGN, ERWIN) 25 August 1994 (1994-08-25)		
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 194 (E-134), 2 October 1982 (1982-10-02) & JP 57 106015 A (MATSUSHITA ELECTRIC WORKS LTD), 1 July 1982 (1982-07-01) * abstract *		
			TECHNICAL FIELD SEARCHED (Int.Cl.7)
			H01F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 May 2000	Examiner Vanhulle, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1600 (02.02.99) (patent)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 0859

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-05-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9619814 A	27-06-1996	DE 9420283 U	30-03-1995
		AT 182230 T	15-07-1999
		AU 4297396 A	10-07-1996
		DE 19581425 D	11-12-1997
		DE 59506401 D	19-08-1999
		EP 0799487 A	08-10-1997
		EP 0921538 A	09-06-1999
		ES 2133836 T	16-09-1999
		GR 3031008 T	31-12-1999
DE 1273630 B		NONE	
WO 9013135 A	01-11-1990	NONE	
DE 3615307 A	12-11-1987	NONE	
DE 9410532 U	25-08-1994	NONE	
JP 57106015 A	01-07-1982	NONE	

EPC FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.